

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 July 2007 (26.07.2007)

PCT

(10) International Publication Number
WO 2007/084417 A2

(51) International Patent Classification:
H04L 12/56 (2006.01)

(21) International Application Number:

PCT/US2007/000942

(22) International Filing Date: 12 January 2007 (12.01.2007)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/759,596	17 January 2006 (17.01.2006)	US
11/351,339	9 February 2006 (09.02.2006)	US

(71) Applicant (for all designated States except US): **SANTERA SYSTEMS, INC** [US/US]; 3605 EAST PLANO PARKWAY, Suite 100, Plano, TX 75074 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HE, Yong** [US/US]; 3113 Spring Grove Dr., Plano, TX 75025 (US). **LEE, Wei-jun** [CA/US]; 3209 Deep Springs Drive, Plano, TX 75025 (US). **SHEN, Mansong** [CN/US]; 4160 Kite Meadow Drive, Plano, TX 75074 (US).

(74) Agent: **HUNT, Gregory, A.; JENKINS, WILSON, TAYLOR & HUNT, P.A.**, SUITE 1200, UNIVERSITY TOWER, 3100 Tower Boulevard, Durham, NC 27707 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: METHODS, SYSTEMS, AND COMPUTER PROGRAM PRODUCTS FOR PROVIDING TRANSCODER FREE OPERATION (TRFO) AND INTERWORKING BETWEEN UNLICENSED MOBILE ACCESS (UMA) AND UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM (UMTS) CALL LEGS USING A MEDIA GATEWAY

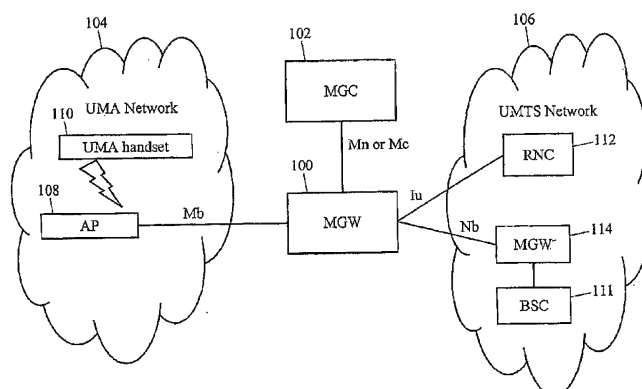

(57) Abstract: Methods, systems, and computer program products for establishing transcoding free connections between UMA and UMTS call legs are disclosed. According to one method, a media gateway determines whether codec configurations used by UMA and UMTS legs of a call are compatible. In response to determining that the configurations are compatible, media gateway determines whether rate control is necessary to establish a transcoding free connection. In response to determining that rate control is necessary, the media gateway issues rate control requests on the UMA and UMTS legs as appropriate. The media gateway determines whether the rate control requests are successful. In response to determining that the requests are successful, the media gateway establishes a transcoding free connection between the UMA and the UMTS legs of the call.

WO 2007/084417 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION

METHODS, SYSTEMS, AND COMPUTER PROGRAM PRODUCTS FOR
PROVIDING TRANSCODER FREE OPERATION (TrFO) AND
INTERWORKING BETWEEN UNLICENSED MOBILE ACCESS (UMA) AND
5 UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM (UMTS) CALL
LEGS USING A MEDIA GATEWAY

RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Patent Application
10 Serial No. 60/759,596, filed January 17, 2006 and U.S. Patent Application
Serial No. 11/351,339, filed February 9, 2006; the disclosures of which are
incorporated herein by reference in their entireties.

TECHNICAL FIELD

15 The subject matter described herein relates to providing transcoder free
operation and interworking between UMA and UMTS call legs. More
particularly, the subject matter described herein relates to methods, systems,
and computer program products for providing transcoder free operation and
interworking between UMA and UMTS call legs using a media gateway.

20

BACKGROUND ART

In voice communications networks, such as voice over IP networks,
transcoding refers to converting from one type of voice compression to another.
Transcoding is necessary when different legs of a call have incompatible
25 coder/decoders (codecs); however, when the different legs of a call use
compatible codecs, it is desirable to establish a transcoding free connection.
Establishing a transcoding free connection is desirable because transcoding
introduces delay and degrades voice quality. The terms "transcoder free" and
"transcoding free" are used interchangeably herein to refer to the absence of
30 transcoding in a connection.

It may be desirable to establish a transcoder free connection when both
legs of a call are UMTS. It may also be desirable to establish a transcoder free
connection when at least one leg of a call is not UMTS. For example, it may be

desirable to establish a transcoder free connection between a UMA call leg and a UMTS call leg. Third Generation Partnership Project (3GPP) Technical Standard TS 29.163 requires transcoder free operation when an IP multimedia media gateway (IM-MGW) is used to bridge a connection between an Nb and an Mb interface. An Mb interface is an interface between the media gateway and an access point in the UMA network. An Nb interface is an interface between the media gateway and another media gateway in the UMTS network.

Although the above-referenced 3GPP standard indicates that transcoder free operation should be implemented by an IM-MGW, the technical standard fails to describe any hardware or software necessary to achieve such operation. Moreover, the technical standard omits many of the details required for transcoder free operation. For example, the technical standard fails to address timing issues with regard to rate control, redundancy reconciliation between the UMA and UMTS networks, and differences in packetization timing between the UMA and UMTS networks.

Accordingly, in light of these difficulties, there exists a need for methods, systems, and computer program products for providing transcoder free operation and interworking between UMA and UMTS call legs using a media gateway.

DISCLOSURE OF THE INVENTION

According to one aspect, the subject matter described herein includes a method for establishing a transcoding free connection between a UMA call leg and a UMTS call leg. The method includes determining whether UMA and UMTS call legs have compatible codecs. In response to determining that the UMA and UMTS call legs have compatible codecs, it is determined whether rate control is needed to establish a transcoding free connection. If it is determined that rate control is needed, at least one rate control request is issued from a media gateway to at least one of the UMA and UMTS call legs. Media streams from the UMA and UMTS call legs are monitored to determine whether the rate control is successful. In response to determining that the rate control is successful, a transcoding free connection is established in the media gateway between the UMA and UMTS call legs.

The terms "call," "session," and "connection" are used interchangeably herein to refer to a path over which media communications are exchanged between UMA and UMTS nodes. Thus, a call, session, or connection that involves UMA and UMTS nodes may carry voice, video, non-voice audio, or any media communication between the nodes.

The subject matter described herein for providing transcoder free operation and interworking between UMA and UMTS call legs using a media gateway may be implemented using hardware, software, firmware, or any combination thereof. In one implementation, the subject matter described herein can be implemented using a computer program product comprising computer executable instructions embodied in a computer readable medium. Exemplary computer readable media suitable for implementing the subject matter described herein include chip memory devices, disk memory devices, programmable logic devices, application specific integrated circuits and downloadable electrical signals. In addition, a computer program product that implements the subject matter described herein can be located on a single computing device or platform or may be distributed across multiple computing devices or platforms.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the subject matter described herein will now be explained with reference to the accompanying drawings:

Figure 1 is a network diagram illustrating a media gateway for providing interworking and transcoder free operation between a UMA network and a UMTS network according to an embodiment of the subject matter described herein;

Figure 2 is a flow chart illustrating exemplary steps for establishing a transcoder free connection between a UMA call leg and a UMTS call leg using a media gateway according to an embodiment of the subject matter described herein;

Figure 3 is a message flow diagram illustrating exemplary rate control requests that may be issued by a media gateway to establish a transcoder free

connection between a UMA call leg and a UMTS call leg according to an embodiment of the subject matter described herein;

Figure 4 is a block diagram illustrating an exemplary internal architecture of a media gateway for establishing a transcoder free connection and for providing interworking between user plane protocols of UMA and UMTS call
5 legs according to an embodiment of the subject matter described herein;

Figure 5 is a block diagram illustrating exemplary steps that may be performed by a media gateway in establishing an internal transcoder free connection for a call that includes a UMA leg and UMTS leg according to an
10 embodiment of the subject matter described herein;

Figure 6 is a block diagram illustrating an alternate method for establishing a transcoder free connection in a media gateway for a call that has a UMA leg and a UMTS leg according to an embodiment of the subject matter described herein;

Figure 7 is a flow chart illustrating exemplary steps that may be performed by a media gateway in response to a codec mode request received from a UMA endpoint of a call including a UMA leg and a UMTS leg according to an embodiment of the subject matter described herein;

Figure 8 is a flow chart illustrating exemplary steps that may be performed by a media gateway in response to a rate control request received from a UMTS leg of a call including a UMTS leg and a UMA leg according to an
20 embodiment of the subject matter described herein;

Figure 9 is a flow chart illustrating exemplary steps for redundancy reconciliation that may be performed by a media gateway for building redundancy on a UMA call leg based on packets received from a UMTS call
25 leg according to an embodiment of the subject matter described herein;

Figure 10 is a flow diagram illustrating redundancy reconciliation for packets transmitted from a UMTS call leg to a UMA call leg according to an embodiment of the subject matter described herein;

Figure 11 is a flow chart illustrating exemplary steps for using redundant frames received on a UMA call leg to restore packets transmitted to a UMTS call leg according to an embodiment of the subject matter described herein;

Figure 12 is a flow diagram illustrating the use of UMA redundancy to transmit a lost frame to a UMTS call leg where the two call legs have the same packetization time according to an embodiment of the subject matter described herein; and

5 Figure 13 is a flow diagram illustrating exemplary steps for using UMA redundancy to transmit lost frames to a UMTS call leg when the two legs have different packetization times according to an embodiment of the subject matter described herein.

10 DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is a block diagram illustrating a network including a media gateway for establishing a transcoder free connection between a UMA call leg and a UMTS call leg according to an embodiment of the subject matter described herein. Referring to Figure 1, a media gateway **100** and a media gateway controller **102** are positioned between UMA network **104** and UMTS network **106**. Media gateway **100** interfaces with an access point (AP) **108** in the UMA network via the Mb interface. A UMA handset **110** may connect to media gateway **100** via access point **108**.

Media gateway **100** interfaces with media gateway controller **102** via an Mn or Mc interface. Media gateway **100** and media gateway controller **102** exchange control and state information via the Mn or Mc interface. For example, media gateway controller **102** may issue MEGACO or MGCP call control commands to media gateway **100** via the Mn or Mc interface to control session setup, tear down, and maintenance.

Media gateway **100** interfaces with UMTS network **106** via an Iu interface and an Nb interface. More particularly, media gateway **100** connects to a radio network controller (RNC) **112** via the Iu interface. Radio network controller **112** may control one or more base stations that allow a UMTS handset to initiate and terminate calls using media gateway **100**. Media gateway **100** connects with media gateway **114** via an Nb interface. Media gateway **114** may connect with one or more base station controllers **116** that allow UMTS handsets to connect to the network via an air interface.

In the network illustrated in Figure 1, it may be desirable to establish calls between UMA network **104** and UMTS network **106**. That is, a call may have a UMA leg that connects to UMA network **104** and a UMTS leg that connects to UMTS network **106**. If the codecs used by the different legs of the call are compatible, it may be desirable to establish a transcoder free connection using media gateway **100** in order to avoid packetization delay and to improve voice quality.

Figure 2 is a flow chart illustrating exemplary steps that may be used to establish a transcoding free connection between a UMA call leg and a UMTS call leg using media gateway **100** according to an embodiment of the subject matter described herein. Referring to Figure 2, in step **200**, media gateway **100** identifies a codec configuration used by different legs of a UMTS-UMA connection. This step may be performed by analyzing call setup signaling messages used to initially establish the UMTS-UMA connection. For example, if call setup is performed using session initiation protocol (SIP), the initial codec used by each endpoint of a connection may be specified in the session description protocol (SDP) portion of each SIP call setup message.

In step **202**, media gateway **100** determines whether the codec configurations of the call legs match. For example, this step may include determining whether both ends of the connection use the same type of codec, such as an adaptive modulation rate (AMR) codec. If it is determined that the codec configurations do not match, control proceeds to step **204** where the connection is set up with transcoding at the media gateway.

In step **202**, if it is determined that the codec configurations match, control proceeds to step **206** where media gateway **100** identifies whether rate control needs to be issued. Rate control is required to be issued for compatible codecs if the encoding rate being transmitted by one side to the other side does not match the decoding rate being used by the receiving side. If the rates are the same, rate control does not need to be issued and control proceeds to step **208** where a transcoding free connection is set up in the media gateway. An exemplary media gateway architecture for establishing a transcoding free connection will be described in detail below.

In step **206**, if it is determined that rate control requests need to be issued, control proceeds to step **210** where media gateway **100** issues rate control requests on the UMA and/or UMTS legs so that the rate sent by the UMA leg to the UMTS leg matches the receiving rate of the UMTS leg and so that the rate sent by the UMTS leg to the UMA leg matches the receiving rate of the UMA leg. In step **212**, media gateway **100** determines whether the rate control is successful. If rate control is not successful, control proceeds to step **204** where the connection in the media gateway is set up with transcoding. If the rate control is successful, control proceeds to step **208** where a transcoding free connection is set up in the media gateway.

Figure 3 is a message flow diagram illustrating exemplary steps that may be performed by media gateway **100** in issuing appropriate rate control as illustrated by step **210** in Figure 2. Referring to Figure 3, it is assumed that UMTS node **108** sends packetized voice information encoded at 12.2 kilobits per second and wants to receive packetized voice encoded at 7.95 kilobits per second. It is also assumed that UMA node **112** or **114** sends packetized voice information encoded at 10.2 kilobits per second and wants to receive packetized voice information encoded at 7.4 kilobits per second. Accordingly, in line 1 of the message flow diagram, media gateway **100** issues a rate control message to UMTS node **108** requesting that UMTS node **108** change its sending codec rate to 7.4 kilobits per second. In line 2 of the message flow diagram, MG **100** issues a codec mode request (CMR) to the UMA node requesting that the UMA node **112** or **114** change its sending codec rate to 7.95 kilobits per second. In line 3 of the message flow diagram, UMTS node **108** sends an acknowledgement message to media gateway **100** acknowledging that the sending codec rate has been changed to 7.4 kilobits per second. Media gateway **100** detects this fact and determines that rate control was successful on the UMTS side. Similarly, in line 4 of the message flow diagram, media gateway **100** detects packetized voice from UMA node **112** or **114** with a media stream encoded at 7.95 kilobits per second. After line 4, media gateway **100** determines that the rate change was successful on the UMA side.

Accordingly, after line 4, media gateway **100** can establish a transcoding free connection between UMTS node **108** and UMA node **112** or **114**. In line 5 of the message flow diagram, UMTS node **108** sends packetized voice information to UMA node **112** or **114** via the transcoder free connection in media gateway **100**. Similarly, in line 6 of the message flow diagram, UMA node **112** or **114** sends packetized voice information to UMTS node **108**.

Figure 4 is a block diagram illustrating an exemplary internal architecture for media gateway **100** according to an embodiment of the subject matter described herein. Referring to Figure 4, media gateway **100** includes a plurality of voice servers **400** for performing voice processing functions. In the illustrated example, each voice server module **400** includes a voice over packet chip **402**, a time slot interconnection (TSI) **404**, a CPU **406**, and a digital signal processor (DSP) **408**. Voice over packet chip **402** of each voice server module **400** includes voice over packet assembly and disassembly capabilities. For example, each voice over packet chip may implement real time transmission protocol (RTP), ATM adaptation layer 1, and ATM adaptation layer 2 for sending and receiving voice packets over IP or ATM networks. TSI **404** makes on demand connections between voice over IP chip channels, TDM matrix channels, and DSPs **408**. Each DSP **408** performs transcoding, echo cancellation, and other payload translation functions. Each DSP **408** may implement luUp and NbUp protocol stacks for interfacing with UMTS nodes. CPU **406** controls the overall operation of each voice server module **400**. Ethernet interfaces **410** connect each voice server module **400** to a packet switching fabric **412**. Packet switching fabric **412** may be any suitable type of switching fabric for switching packets between voice server module **400** and Ethernet interfaces **410**. Examples of switching fabrics suitable for use with embodiments with the subject matter described herein include ATM switching fabrics and Ethernet switching fabrics. In the examples described below, it will be assumed that packet switching fabric **412** comprises an Ethernet switching fabric.

Media gateway **100** also includes broadband network interfaces **414** for connecting media gateway **100** to external networks for receiving packets from the network. Broadband network interfaces **414** may include IP network

interfaces as well as ATM network interfaces. Each broadband network interface **414** may include a network processor **416**, a connection table **418**, and an Ethernet interface **420**. Network processors **416** may control the writing of data to each connection table **418**. Each connection table **418** maintains
5 connection data for forwarding media packets to the correct voice server. Internal Ethernet interfaces **420** connect each broadband network interface **414** to packet switching fabric **412**.

Packet switching fabric **412** interconnects voice servers **400** and broadband network interfaces **414**. In the illustrated example, packet switching
10 fabric **412** includes a plurality of ports, numbered 1-5. Five ports are shown for illustrative purposes only. It is understood that packet switching fabric **412** may include fewer or more than five ports, depending on the number of devices connected to packet switching fabric **412**.

Media gateway **100** also includes a TDM matrix module **422** for
15 switching TDM timeslots between TDM network interfaces **424** and voice servers **400**. TDM network interfaces **424** connect media gateway **100** to external TDM devices, such as TDM-enabled switching offices.

A control module **426** controls the overall operation of media gateway
20 **100**. In the illustrated example, control module **426** includes a UMA-UMTS TrFO controller **428** for receiving information from CPUs **406** of each voice server module regarding ingress and egress encoding rates being used by media streams of a UMA or a UMTS connection. UMA-UMTS TrFO controller **428** may also receive data from media gateway controller **102** indicating initial rates used by each end of a UMA-UMTS connection. UMA-UMTS TrFO
25 controller **428** may determine, based on the rates, whether TrFO is possible and instruct the CPUs of the appropriate voice servers to issue rate control requests and establish a Transcoding free connection.

Figure 5 is a block diagram illustrating exemplary steps for achieving TrFO for a call that includes a UMA leg and a UMTS leg according to an
30 embodiment of the subject matter described herein. Referring to Figure 5, a first call leg (labeled 1) is established between UMA node **112** or **114** and voice server card **400A**. A second call leg (labeled 2) is established between UMTS node **108** and a second voice server card **400B**. A third media connection

(labeled 3) is established between broadband interface card **414** and voice server **400B**. Once UMA-UMTS TrFO controller **428** determines that transcoder free operation is possible and instructs the voice server cards to issue any needed rate control, UMA-UMTS TrFO controller **428** instructs

5 broadband interface card **414** to replace connection 1 with connection 3. Replacing connection 1 with connection 3 may include instructing broadband interface card **414** to update its connection table **418** to reflect the new voice server for the call.

Setting up the transcoding free connection may include instructing voice

10 server card **400B** to implement the appropriate Nb or Iu protocol stack for interfacing with UMTS node **108** over a transcoding-free channel. Tables 1 and 2 shown below illustrate the status of connection table **418** of a broadband network interface card **414** before and after a transcoding free connection is established. Tables 1 and 2 each include a first column indicating the external

15 or network VPI/VCI value associated with incoming ATM cells that carry voice. The second column in each table includes a new VPI/VCI value used internally between the voice server cards and the network interfaces. The third column includes the voice server MAC address corresponding to the connection. It can be seen that in Table 1, before the transcoding free connection is established,

20 the connection to each endpoint includes a separate voice server MAC address. In Table 2, after the transcoding free connection is established, the voice server MAC address to which both endpoints of the connection are connected is Ethernet address Eth0, which corresponds to a single voice server card.

25

External VPI/VCI	New VPI/VCI	Voice Server MAC Addr.
100/1	110/1	Eth 0
100/2	110/2	Eth 1

Table 1: Broadband Interface Connection Table Before TrFO

External VPI/VC1	New VPI/VC1	Voice Server MAC Addr.
100/1	110/3	Eth 1
100/2	110/2	Eth 1

Table 2: Broadband Interface Connection Table After TrFO

An important function performed by a DSP once a transcoding free connection is established is radio access bearer sub-flow combination indicator (RFCI) mapping. In order to perform such mapping, the DSP may maintain separate RFCI values for each connection endpoint. Tables 3 and 4 shown below are examples of RFCI values that may be maintained by a DSP on a voice server card according to an embodiment of the subject matter described herein.

Channel Index	Rate
1	12.2k
2	10.2k
3	7.95k
4	6.7k

Table 3: RFCI Values and Rates for Endpoint A

Channel Index	Rate
5	12.2k
6	10.2k
7	7.95k
8	6.7k

Table 4: RFCI Values and Rates for Endpoint B

From Tables 3 and 4, the channel index and the corresponding rates for each endpoint can be determined. Once the DSP knows the indices and corresponding rates, the DSP can perform mappings between indices used by different endpoints. In the examples illustrated in Tables 3 and 4, the mappings would be 1-5, 2-6, 3-7, and 4-8.

Figure 6 is a block diagram illustrating an alternate method for implementing TrFO for a call having a UMA leg and a UMTS leg in a media

gateway according to an embodiment of the subject matter described herein. Referring to Figure 6, a first media stream connection (labeled 1) is established between UMA node **112** or **114** and voice server **400A**. A second media connection (labeled 2) is established between UMTS node **108** and voice server **400B**. Once UMA-UMTS TrFO controller **428** (illustrated in Figure 4) determines that transcoder-free operation is possible, UMA-UMTS TrFO controller **428** instructs voice server **402A** to perform a loop back function and to initiate a connection (labeled 3) with voice server **402B**. Implementing a loop back connection at voice server **402A** means that the DSP on voice server **402A** is not impacted. Thus, even though the solution illustrated in Figure 6 requires two voice servers, DSP processing resources are conserved over conventional TrFO implementations in media gateway, because DSP resources on the voice server where the loop back is implemented are not used.

Rate Control Procedures

As described above, one aspect of establishing and maintaining a transcoding free connection for a call that includes a UMA and a UMTS leg is implementing rate control for both legs of a call. UMTS protocols include rate control messages to implement rate control procedures. UMA protocols do not have separate rate control messages and instead uses a codec mode request (CMR) field stored in media stream packets. While the above-referenced 3GPP standard indicates that media gateways should appropriately handle rate control requests from the Mb interface or the Nb interface, the standard is silent as to the timing and other implementation details of such procedures.

Figure 7 is a flow chart illustrating exemplary steps that may be performed by a media gateway **100** in processing a rate control request initiated by a UMA endpoint according to an embodiment of the subject matter described herein. Referring to Figure 7, in step **700**, media gateway **100** receives a media packet including a CMR field on the Mb interface. In step **702**, media gateway issues a rate control request on the lu or Nb interface, depending on how the UMTS node is connected to media gateway **100**, requesting that the UMTS endpoint begin sending media packets encoded at the requested rate.

In step **704**, processing diverges depending on whether the UMTS endpoint is using luUP version 1 or version 2. If luUP version 1 is being used, control proceeds to step **706** where media gateway **100** monitors voice packets on the lu interface to see if the rate changes before a timeout period. In step
5 **708**, if media gateway **100** determines that the rate has changed, control proceeds to step **710** where media gateway **100** determines that the rate change was successful. In step **710**, if media gateway **100** determines that the rate has not changed before the timeout period, control proceeds to step **714** where media gateway **100** determines that the rate change was not successful.

10 Returning to step **704**, if luUP version 1 is not being used, control proceeds to step **716** where media gateway **100** determines whether luUP version 2 or NbUP is being used on the UMTS leg. If neither of these protocols is being used, control proceeds to step **718** where other protocol processing is performed. If, however, one of these protocols is being used, control proceeds
15 to step **720** where media gateway **100** waits for an acknowledgement from the UMTS leg on the lu or Nb interface. In step **722**, media gateway **100** determines whether the acknowledgement was received within the timeout period. If the acknowledgment was received within the timeout period, control proceeds to step **712** where media gateway **100** determines that the rate
20 change was successful. If, however, media gateway **100** does not receive the acknowledgement within the timeout period, media gateway **100** proceeds to step **714** where it determines that the rate change was unsuccessful.

Figure 8 is a flow chart illustrating exemplary steps that may be performed by media gateway **100** in responding to a rate control request initiated by the UMTS leg of a call or session. Referring to Figure 8, in step
25 **800**, media gateway **100** receives a rate control request on the lu or Nb interface. In step **802**, media gateway **100** changes the CMR field on all packets sent over the Mb interface to reflect the requested rate. In step **804**, processing diverges depending on whether luUP version 1 is being used. If
30 luUP version 1 is being used, control proceeds to step **806** where media gateway **100** sends packetized voice to the UMTS interface where the packetized is encoded at the rate at which media gateway **100** receives packetized voice on the Mb interface.

If luUP version 1 is not being used, control proceeds to step **808** where media gateway **100** determines whether luUP version 2 or NbUP is being used. If neither of these protocols is being used, control proceeds to step **810** where media gateway **100** performs other protocol processing. If however, one of these protocols is being used, control proceeds to step **812** where media gateway **100** monitors the encoding rate being used on the Mb interface. In step **816**, media gateway **100** determines whether the requested rate is detected within the timeout period. If the requested rate is not detected within the timeout period, control proceeds to step **818** where media gateway **100** sends a negative acknowledgment on the lu or Nb interface. If the requested rate is being used within the timeout period, control proceeds to step **820** where media gateway **100** sends positive acknowledgement on the lu or Nb interface.

Redundancy Reconciliation

Another aspect of establishing and maintaining a transcoding free connection between a UMA and a UMTS call leg is redundancy reconciliation. A UMA connection uses packet redundancy to reconstruct voice packets in the event that a packet is lost. However, such redundancy is not used on a UMTS connection. Accordingly, media gateway **100** may reconcile this redundancy and send the appropriate packets over the UMTS and UMA legs of a connection.

Figure 9 is a flow chart illustrating exemplary steps performed by media gateway **100** in building redundant voice frames to be sent over a UMA leg based on voice frames received over a UMTS leg of a connection. Referring to Figure 9, in step **900**, media gateway **100** receives a packet from a UMTS call leg including a current voice frame. If the current voice frame is the first voice frame received for a connection, it is sent to the UMA leg without waiting to build redundancy in order to avoid delays. However, media gateway **100** may copy the current voice frame to sent with the next current voice frame as a redundant voice frame. Accordingly, in step **902**, media gateway **100** buffers $n+1$ voice frames, where n is the UMA redundancy level and builds packets to send over the UMA call leg with the appropriate redundancy level. In step **904**,

media gateway **100** sends packets with the current voice frame and n previous voice frames to the UMA leg.

It should be noted that each current voice frame may be sent immediately to the UMA leg. Copies of each current voice frame may be made
5 and maintained by media gateway **100** to build redundant frames to be sent along with each current voice frame.

Figure 10 is a flow diagram illustrating exemplary steps for building UMA redundancy from UMTS data. Referring to Figure 10, in line 1, media gateway **100** receives a packet with voice frame F1 from a UMTS leg of a call. In line 2,
10 media gateway **100** immediately sends a packet with voice frame F1 over the UMA call leg. In line 3, media gateway **100** receives a packet with voice frame F2 from the UMTS call leg. In line 4, media gateway **100** sends a voice packet with frames F1 and F2 to the UMA call leg. In line 5 of the message flow diagram, media gateway **100** receives a packet with voice frame F3. In line 6,
15 of the message flow diagram, media gateway **100** sends a voice packet with voice frames F2 and F3 to the UMA call leg.

Figure 11 is a flow chart illustrating exemplary steps that may be performed by media gateway **100** in processing packets received from the UMA leg. Referring to Figure 11, in step **1100**, media gateway **100** receives
20 packets with the current voice frame and n previous voice frames from the UMA call leg. In step **1102**, media gateway forwards the current voice frame to the UMTS call leg. In step **1104**, media gateway determines whether a packet loss was detected on the UMA call leg. If a packet loss has not been detected, control returns to step **1100** where the next UMA packet is received and
25 processed.

In step **1100**, if a packet loss is detected on the UMA leg, control proceeds to step **1106** where media gateway **100** receives the next packet from the UMA call leg. In step **1108**, media gateway **100** forwards the current voice frame and previous lost voice frames to the UMTS call leg.

30 Figure 12 is a message flow diagram corresponding to the flow chart of Figure 11. In Figure 12, it is assumed that the packetization times of the UMA and UMTS call legs are the same. In lines 1-3 of the message flow diagram, media gateway **100** receives packets from the UMA leg and forwards the

current voice frame to the UMTS leg. In line 4, a packet loss occurs on the UMA call leg. In line 5, the packet with the current voice frame and the lost frame are received from the UMA leg. Media gateway **100** sends the current packet and the lost packet at about the same time.

5 Figure 13 is a flow diagram illustrating redundancy reconciliation that may be performed by media gateway **100** where the UMA and UMTS legs use different packetization times. In Figure 13, the UMA leg uses a 40 millisecond packetization time and the UMTS leg uses a 20 millisecond packetization time.

Referring to Figure 13, in line 1, the UMA call leg sends a packet with voice
10 frames F1 and F2 to media gateway **100**. Media gateway **100** immediately sends both packets F1 and F2 to the UMTS leg in light of the different packetization time. In line 2 of the message flow diagram, at 80 milliseconds, the UMA call leg sends a packet with voice frames F1, F2, F3, and F4, where frames F3 and F4 are current. Media gateway **100** sends only the current
15 frames F3 and F4 to the UMTS leg. In line 3 of the message flow diagram, a packet is lost. In line 4 of the message flow diagram, media gateway **100** receives a packet from the UMA leg with voice frames F5-F8. Since none of these frames have been sent to the UMTS leg, media gateway **100** sends four packets with voice frames F5-F8 to the UMTS call leg.

20 It will be understood that various details of the subject matter described herein may be changed without departing from the scope of the subject matter herein. Furthermore, the foregoing description is for the purpose of illustration only, and not for the purpose of limitation.

CLAIMS

What is claimed is:

1. A method for establishing a transcoding free connection in a media gateway for a connection having an unlicensed mobile access (UMA) leg and a universal mobile telecommunications service (UMTS) leg, the method comprising:
 - (a) determining whether codec configurations used by different legs of a UMA-UMTS connection are compatible;
 - (b) in response to determining that the codec configurations are compatible, determining whether rate control is required to establish a transcoding free connection;
 - (c) in response to determining that rate control is required, issuing a rate control request to at least one of the UMTS and UMA legs;
 - (d) determining whether the rate control request is successful; and
 - (e) in response to determining that the rate control request is successful, establishing a transcoding free connection between the UMTS and the UMA leg in the media gateway.
2. The method of claim 1 wherein issuing at least rate control request includes issuing a rate control request to the UMTS leg requesting that the UMTS leg start sending voice packets encoded at a rate corresponding to a decoding rate of the UMA leg.
3. The method of claim 2 wherein determining whether the rate control request is successful includes monitoring voice packets received from the UMTS leg to determine whether the encoding rate used by the UMTS leg changes within a timeout period.
4. The method of claim 2 wherein determining whether the rate control request is successful includes determining whether an acknowledgment is received from the UMTS leg.
5. The method of claim 1 wherein issuing a rate control request on at least one of the UMTS and UMA legs includes sending a codec mode request (CMR) over the UMA leg.
6. The method of claim 5 wherein determining whether the rate control request is successful includes monitoring an encoding rate of packets

received from the UMA leg and determining whether the requested rate is achieved within a timeout period.

7. The method of claim 6 comprising, in response to determining that the requested rate is achieved, sending an acknowledgement to the UMTS leg.
8. The method of claim 6, comprising, in response to determining that the requested rate is not achieved, sending a negative acknowledgement to the UMTS leg.
9. The method of claim 1 wherein establishing a transcoding free connection in the media gateway includes connecting the UMTS leg to the UMA leg over an Ethernet switching fabric within the media gateway.
10. The method of claim 1 wherein establishing a transcoding free connection in the media gateway includes connecting the UMTS leg to the UMA leg over an asynchronous transfer mode (ATM) switching fabric within the media gateway.
11. The method of claim 1 comprising maintaining the transcoding free connection between the UMA leg and the UMTS leg.
12. The method of claim 11 wherein maintaining the transcoding free connection includes performing redundancy reconciliation for redundant voice frames received from the UMA leg.
13. The method of claim 12 wherein performing redundancy reconciliation for voice frames received over the UMA leg includes receiving redundant frames over the UMA leg and sending current frames to the UMTS leg.
14. The method of claim 12 wherein maintaining the transcoding free connection includes performing redundancy reconciliation for frames received over the UMTS leg.
15. The method of claim 14 wherein performing redundancy reconciliation for frames received over the UMTS leg includes receiving frames without redundancy over the UMTS leg, building redundant frames, and transmitting the redundant frames over the UMA leg.

16. A media gateway for establishing a transcoding free connection between unlicensed mobile access (UMA) and universal mobile telecommunications service (UMTS) legs of a connection, the media gateway comprising:
- 5 (a) at least one broadband interface for sending media packets to and from a UMA leg and a UMTS leg of a connection;
- (b) a packet switching fabric for forwarding media packets between the at least one broadband interface and at least one internal processing resource of the media gateway;
- 10 (c) at least one voice server for performing voice processing functions for media packets received from the UMA leg and the UMTS leg; and
- (d) a UMA-UMTS transcoder free operation controller for establishing a transcoding free connection within the media gateway between the UMA and the UMTS legs via the at least
- 15 one broadband interface, the packet switching fabric, and the at least one voice server.
17. The media gateway of claim 16 wherein the at least voice server is adapted to issue a rate control request to at least one of the UMA leg
- 20 and the UMTS leg to establish the transcoding free connection.
18. The media gateway of claim 17 wherein the at least one voice server is adapted to issue a UMTS rate control request to the UMTS leg.
19. The media gateway of claim 18 wherein the at least one voice server is adapted to monitor the encoding rate being used by the UMTS leg.
- 25 20. The media gateway of claim 18 wherein the at least one voice server is adapted to monitor the UMTS leg for an acknowledgement to the rate control request.
21. The media gateway of claim 18 wherein the at least one voice server is adapted to issue a codec mode request (CMR) to the UMA leg.
- 30 22. The media gateway of claim 21 wherein the at least one voice server is adapted to monitor the encoding rate being used by the UMA leg.

23. The media gateway of claim 22 wherein the at least one voice server is adapted to send an acknowledgement to the UMTS leg in response to determining that the codec mode request on the UMA leg is successful.
24. The media gateway of claim 22 wherein the at least one voice server is adapted to send a negative acknowledgement to the UMTS leg in response to failing to detect a change in the encoding rate on the UMA leg.
25. The media gateway of claim 16 wherein the at least one voice server is adapted to maintain the transcoding free connection.
26. The media gateway of claim 25 wherein, in maintaining the transcoding free connection, the at least one voice server is adapted to perform redundancy reconciliation between the UMA and UMTS legs.
27. The media gateway of claim 26 wherein, in performing the redundancy reconciliation, the at least one voice server is adapted to build redundant voice frames to be transmitted over the UMA leg based on packets received over the UMTS leg.
28. The media gateway of claim 26 wherein, in performing the redundancy reconciliation, the at least one voice server is adapted to receive redundant voice frames from the UMA leg and transmit current voice frames over the UMTS leg.
29. A computer program product comprising computer executable instructions embodied in a computer readable medium for performing steps comprising:
- (a) determining whether codec configurations used by different legs of a unlicensed mobile access-universal mobile telecommunications service (UMA-UMTS) connection are compatible;
 - (b) in response to determining that the codec configurations are compatible, determining whether rate control is required to establish a transcoding free connection;
 - (c) in response to determining that rate control is required, issuing a rate control request to at least one of the UMTS and UMA legs;
 - (d) determining whether the rate control request is successful; and

- (e) in response to determining that the rate control request is successful, establishing a transcoder free connection between the UMTS leg and the UMA leg in the media gateway.

1/13

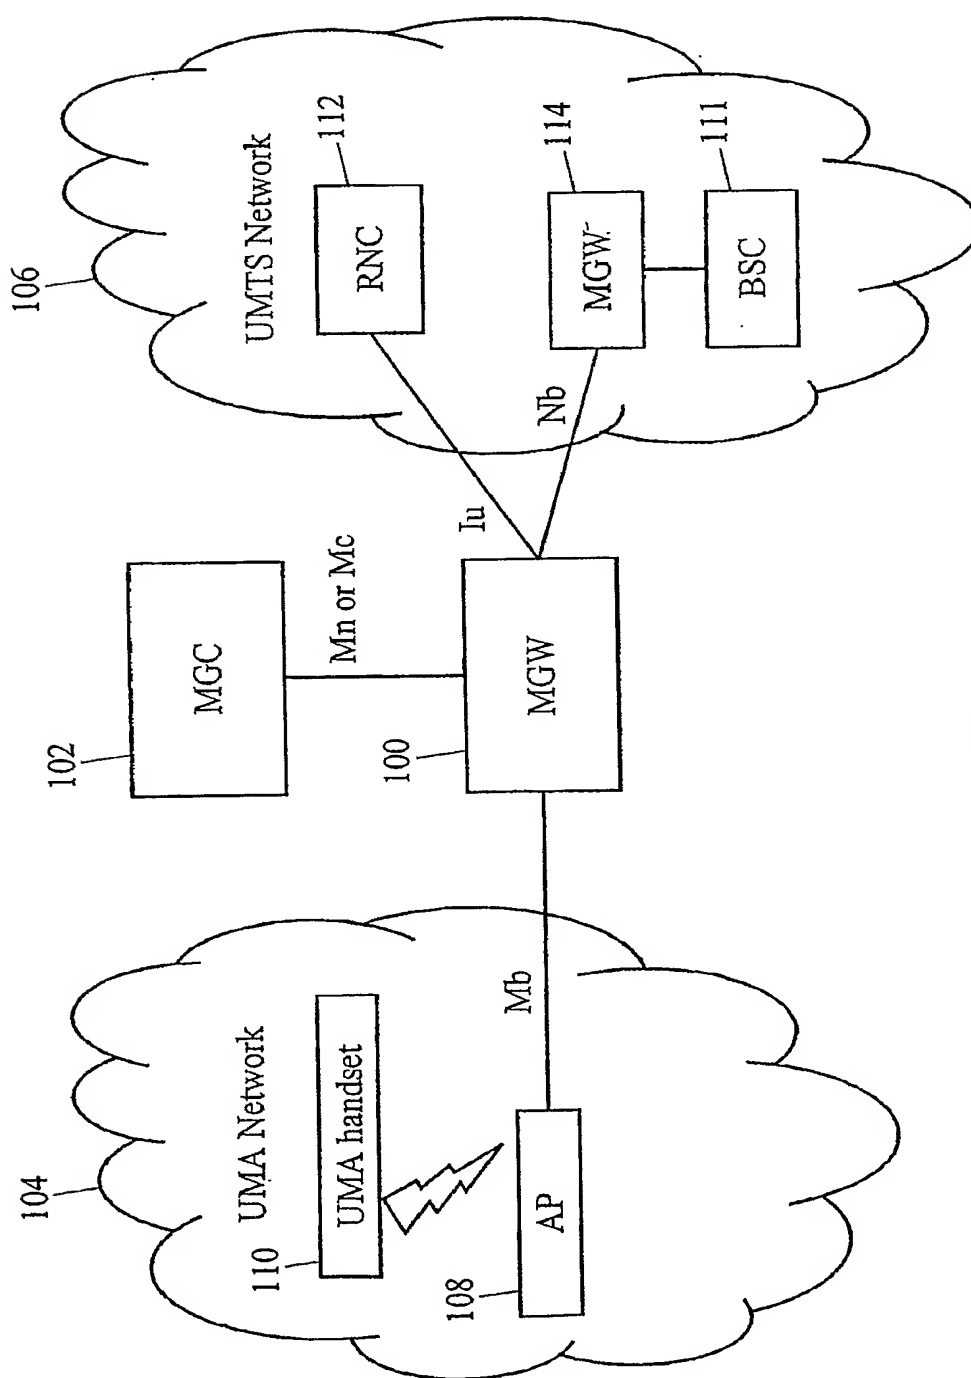


FIG. 1

2/13

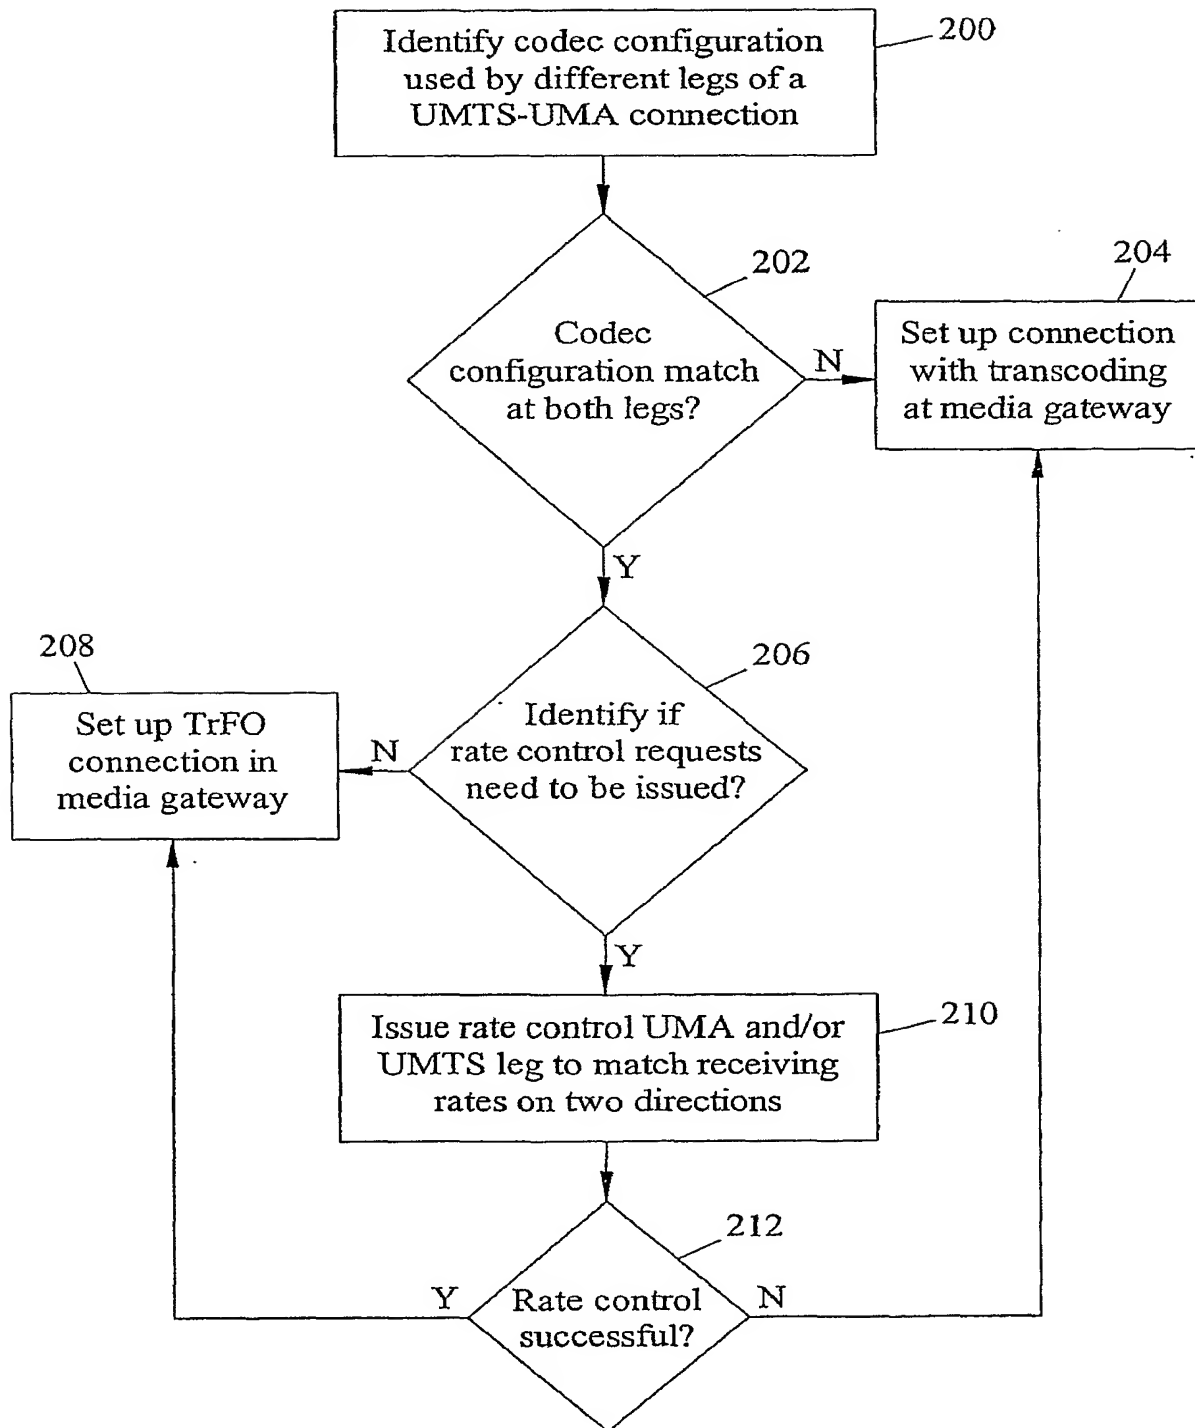


FIG. 2

3/13

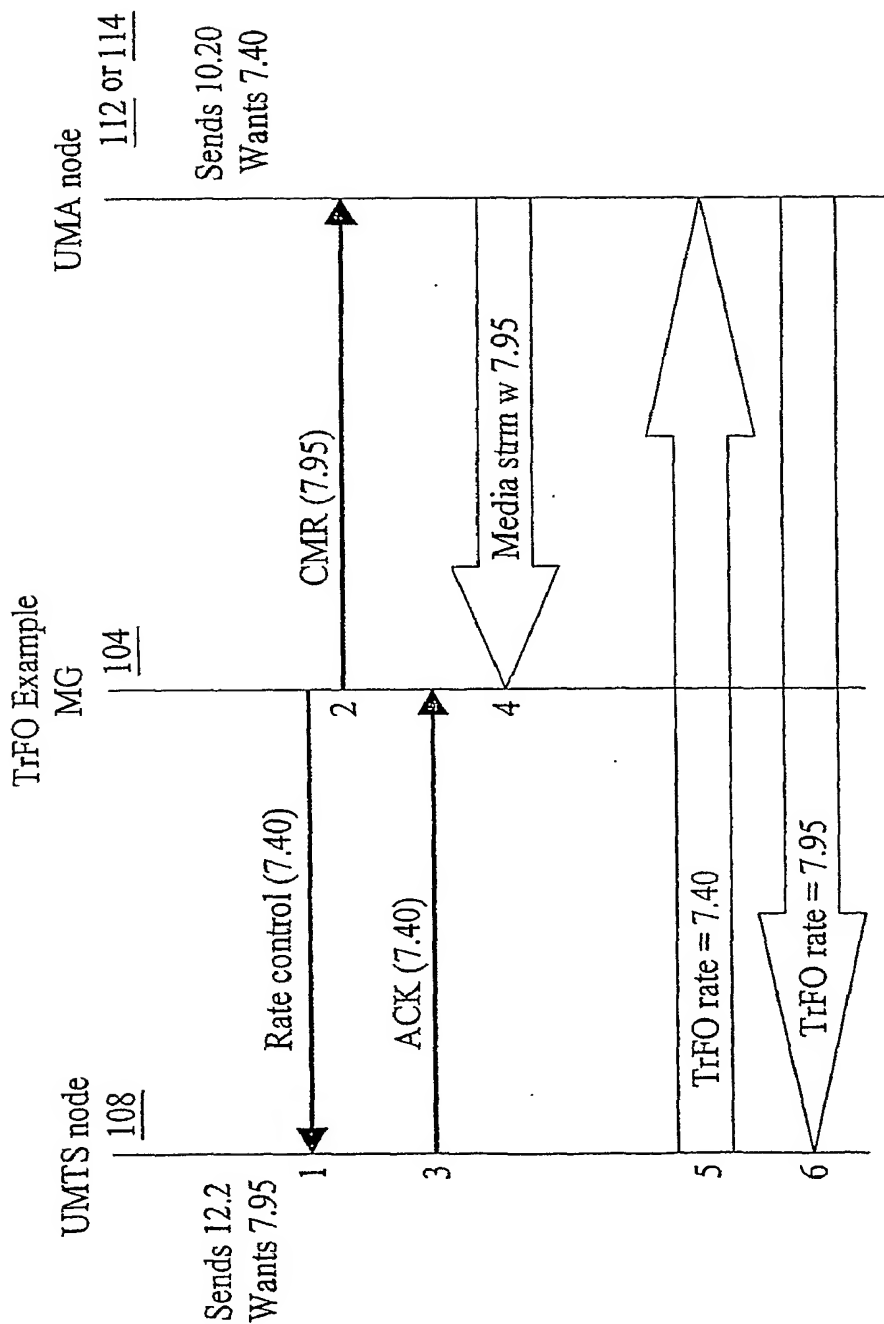


FIG. 3

4/13

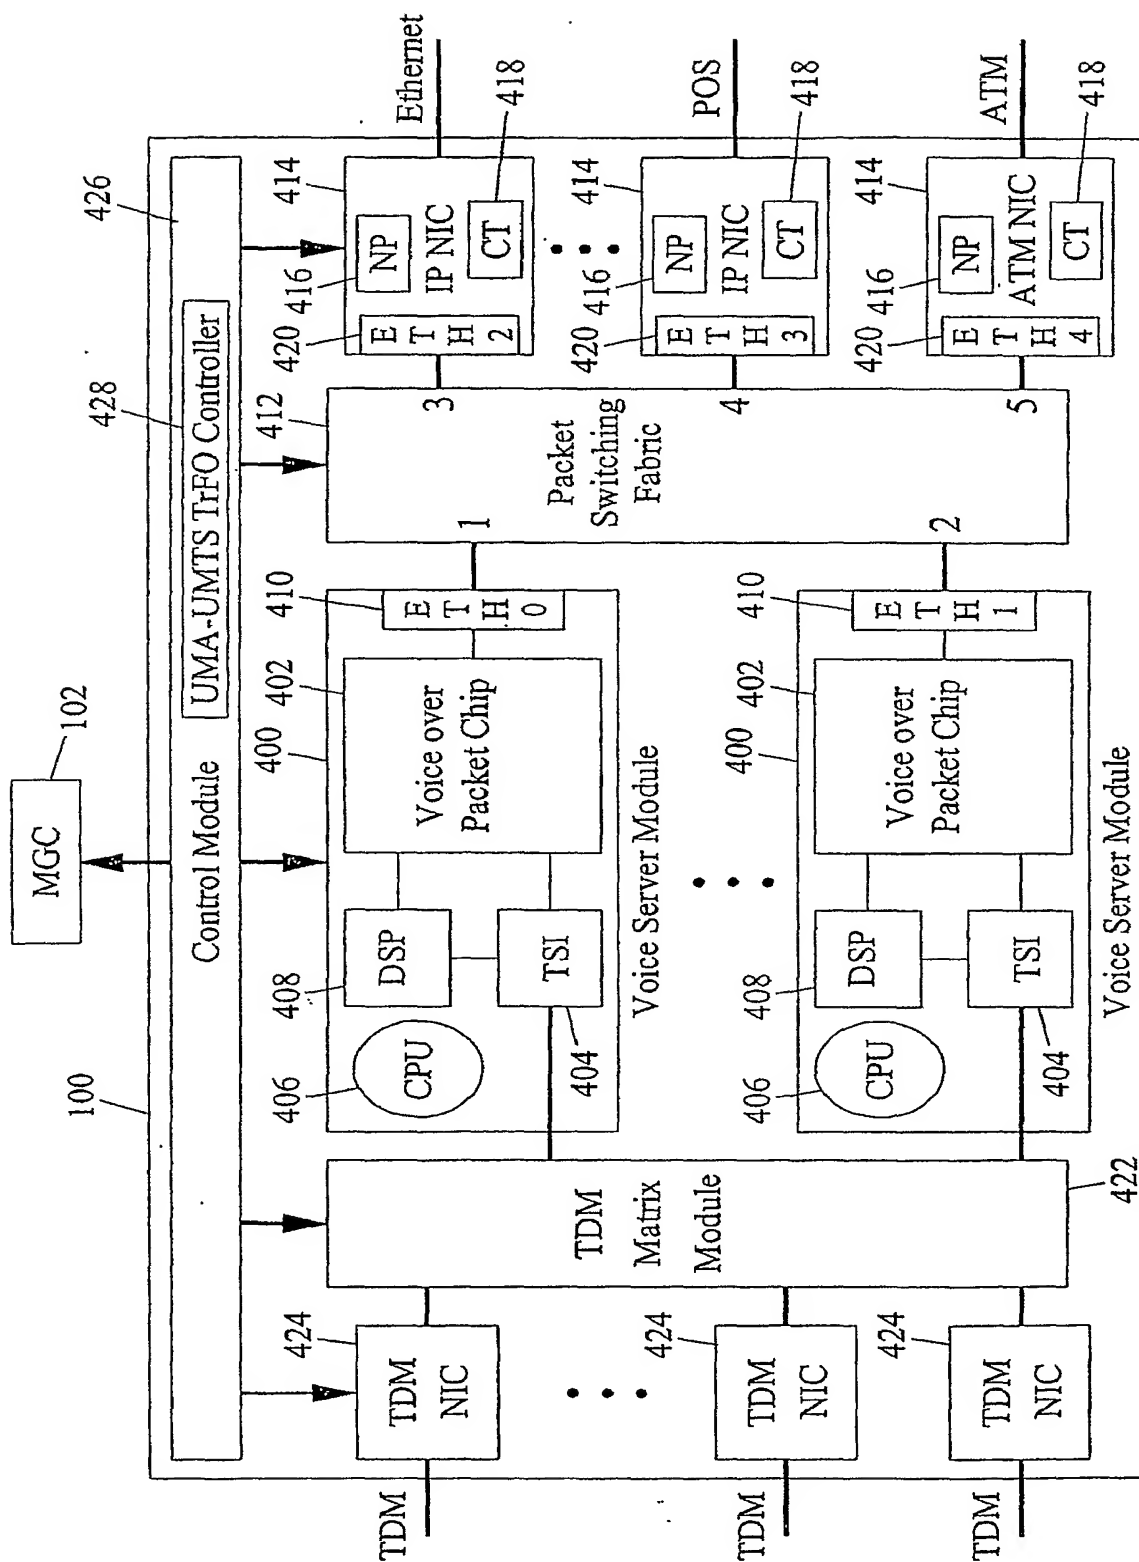


FIG. 4

5/13

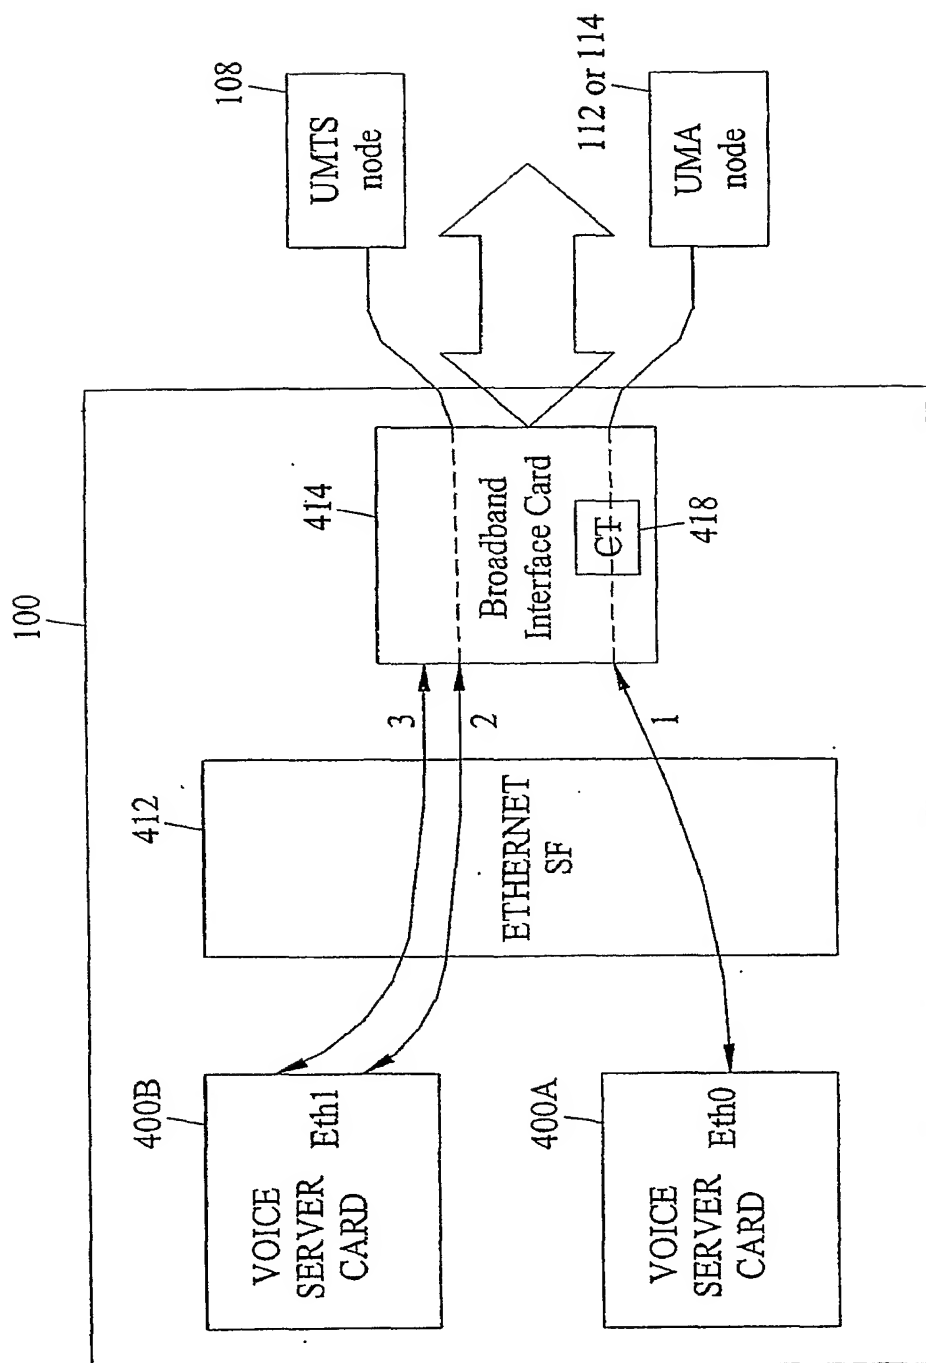


FIG. 5

6/13

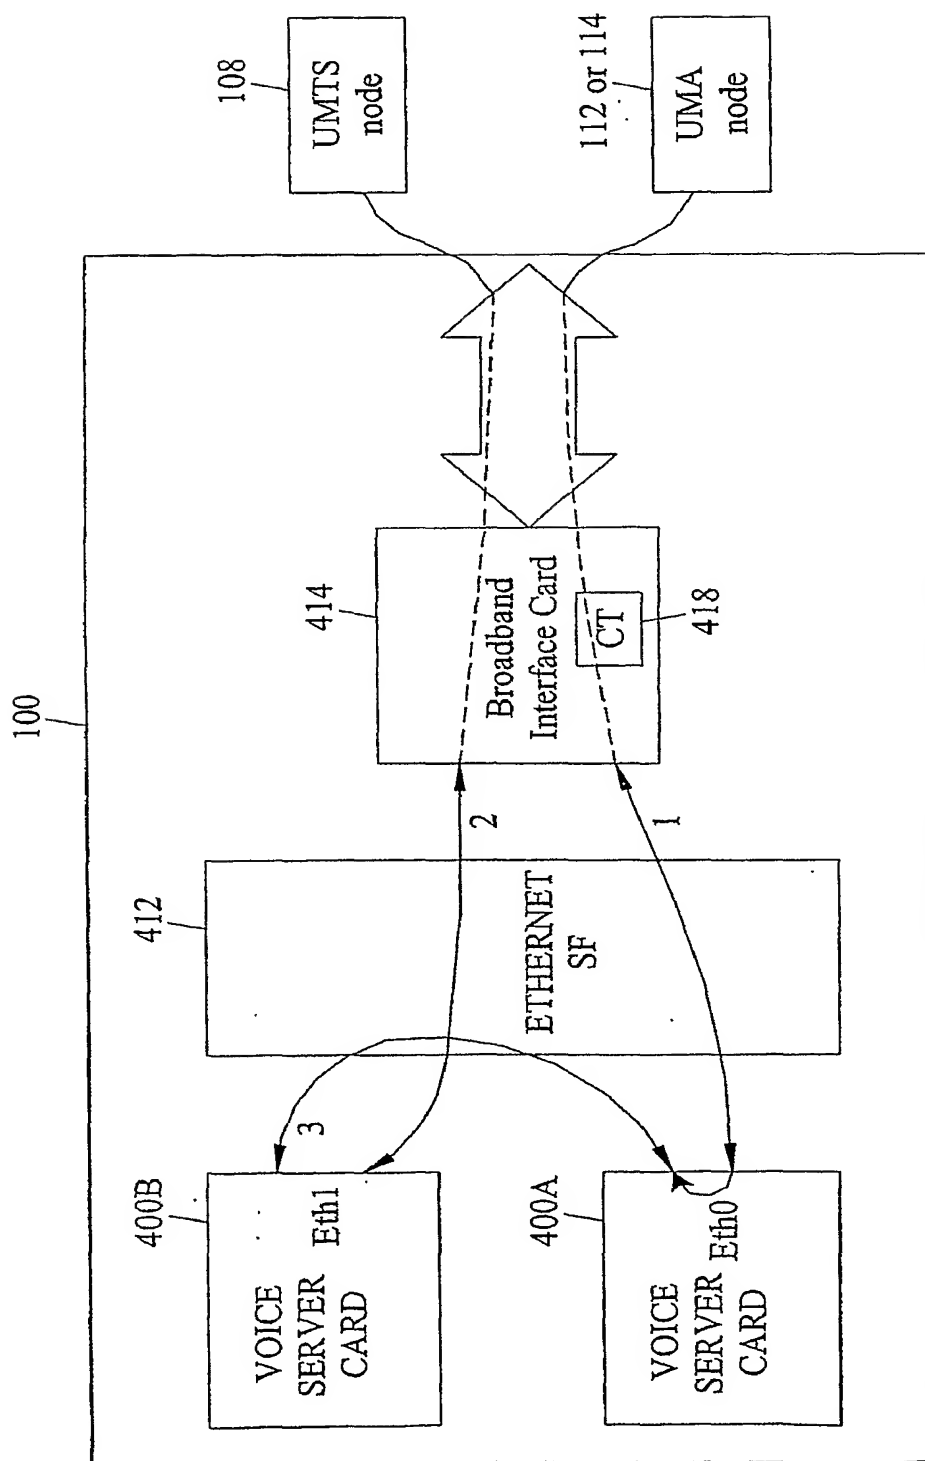


FIG. 6

7/13

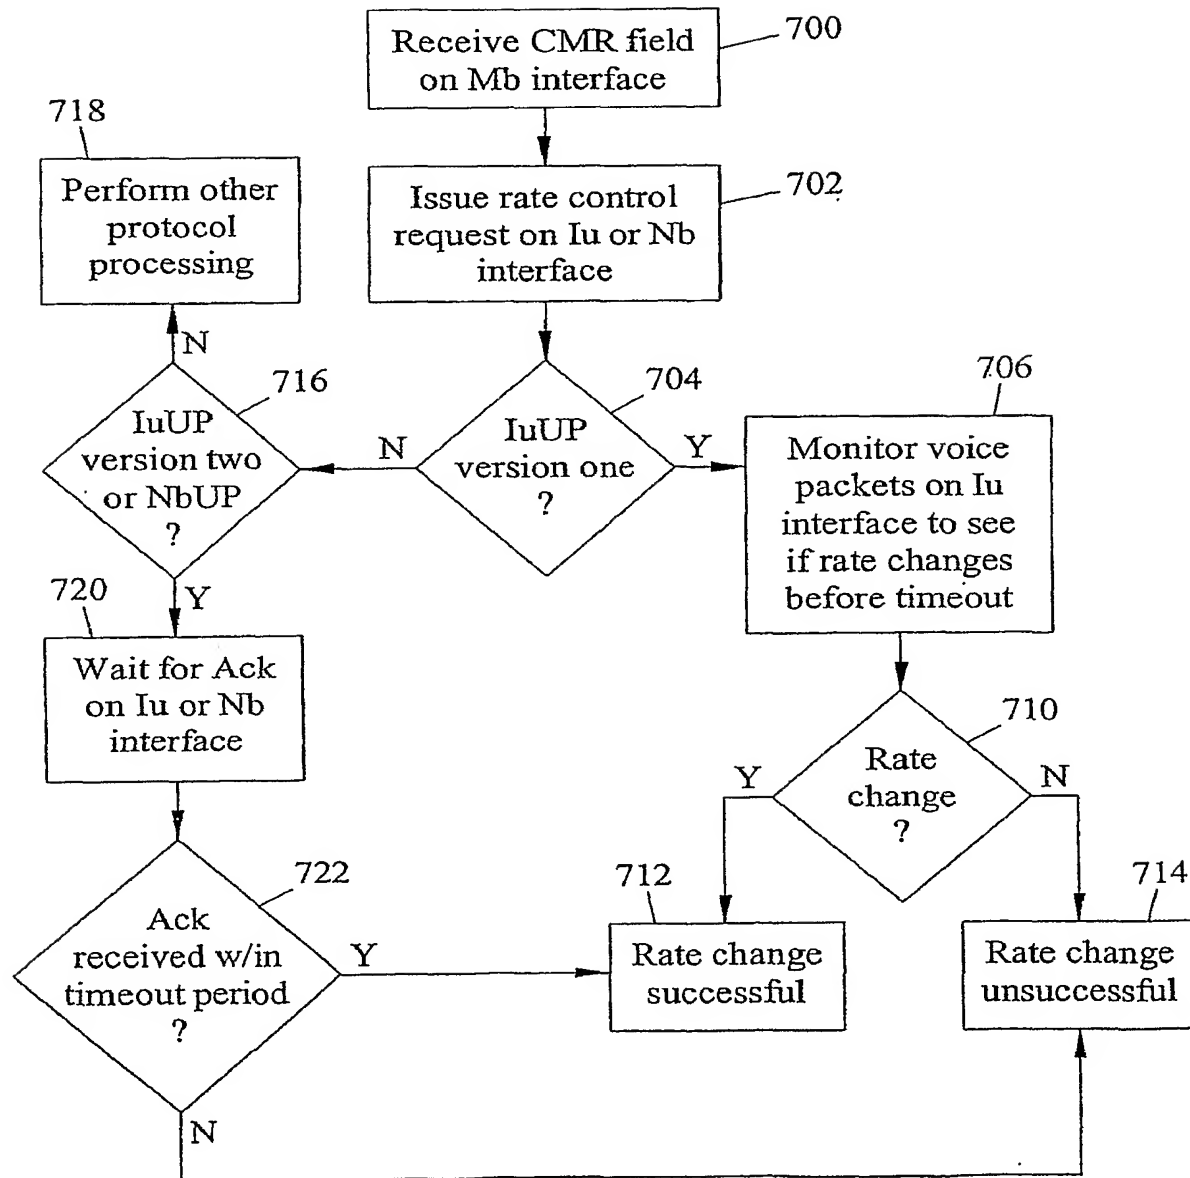


FIG. 7

8/13

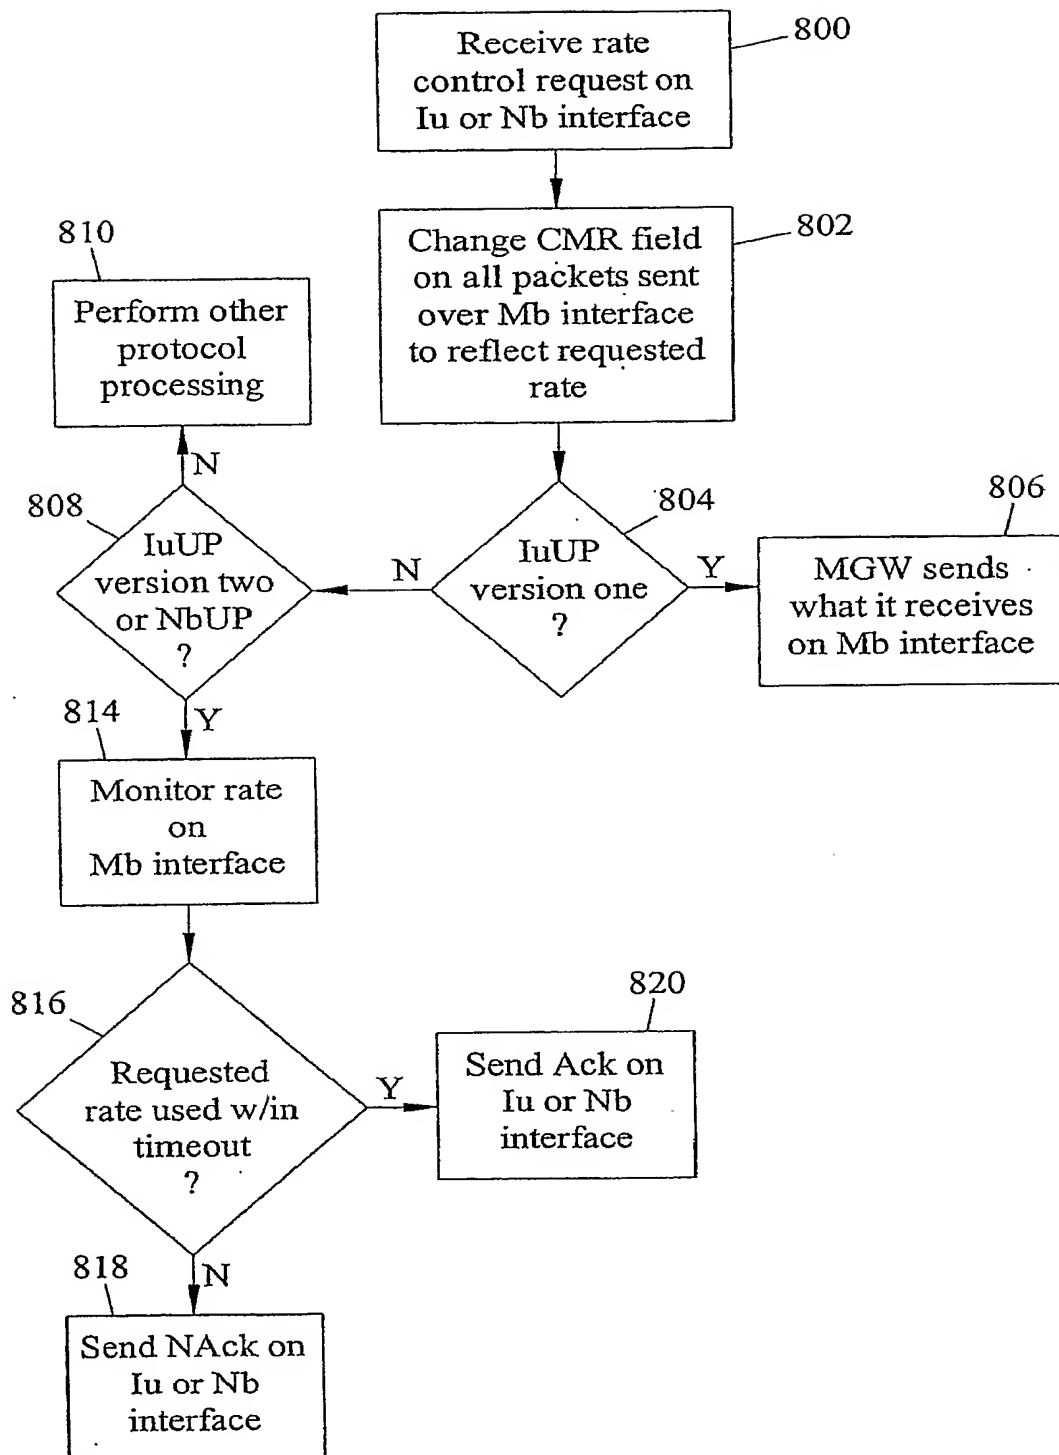


FIG. 8

9/13

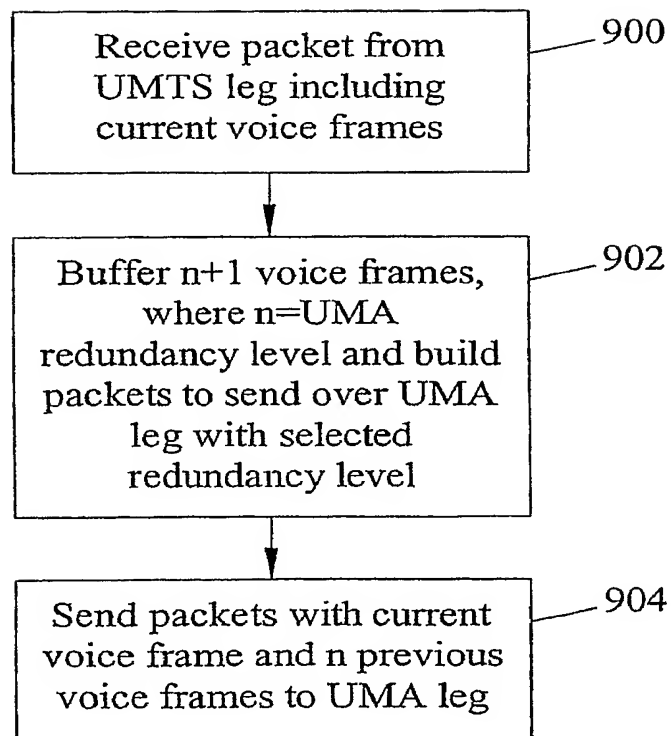


FIG. 9

10/13

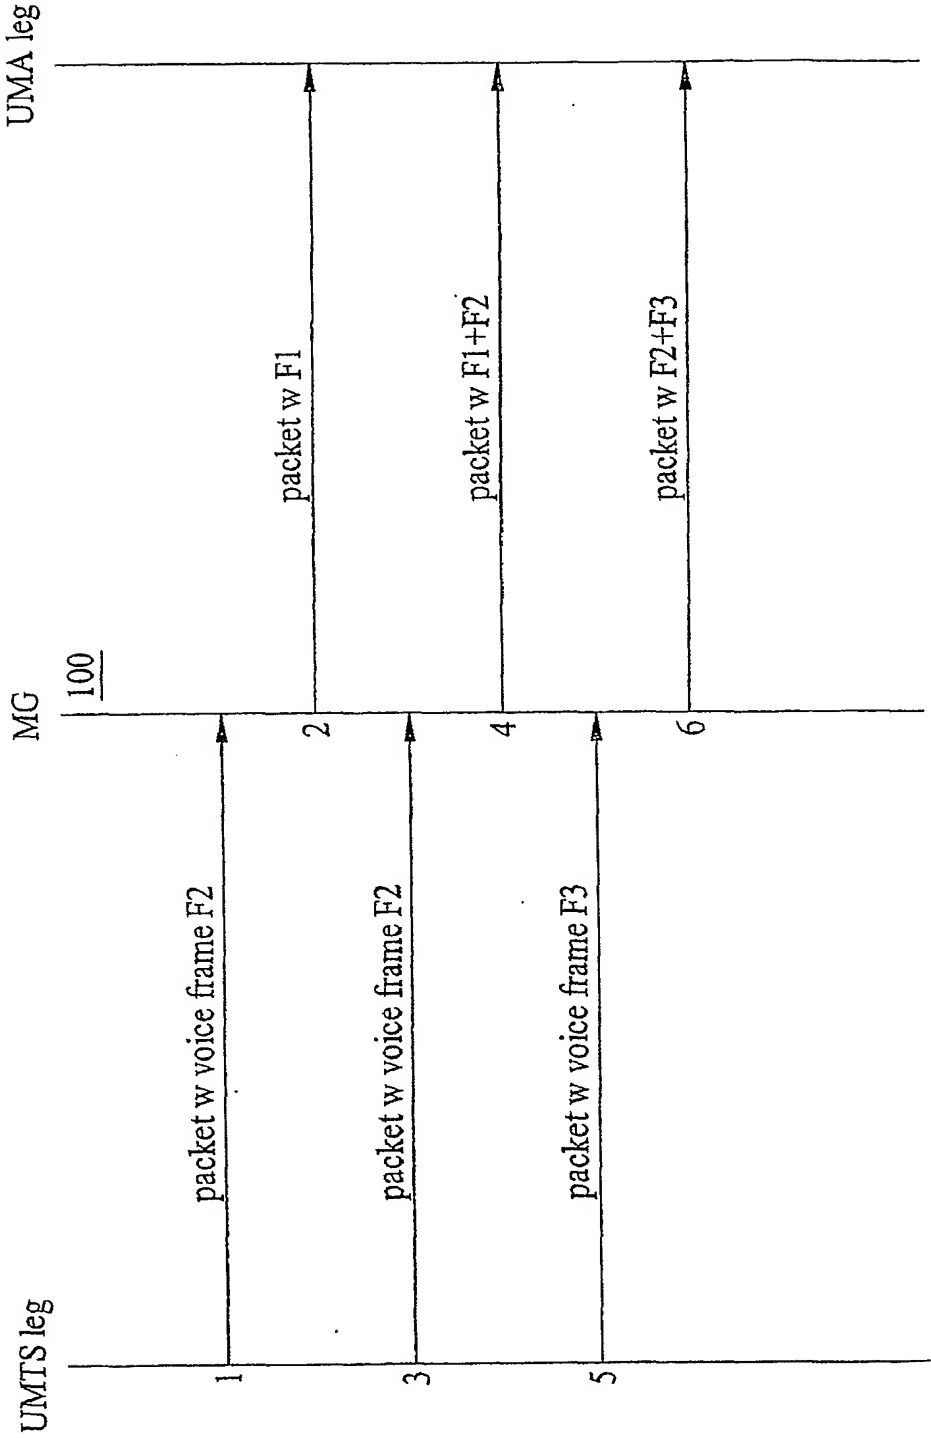


FIG. 10

11/13

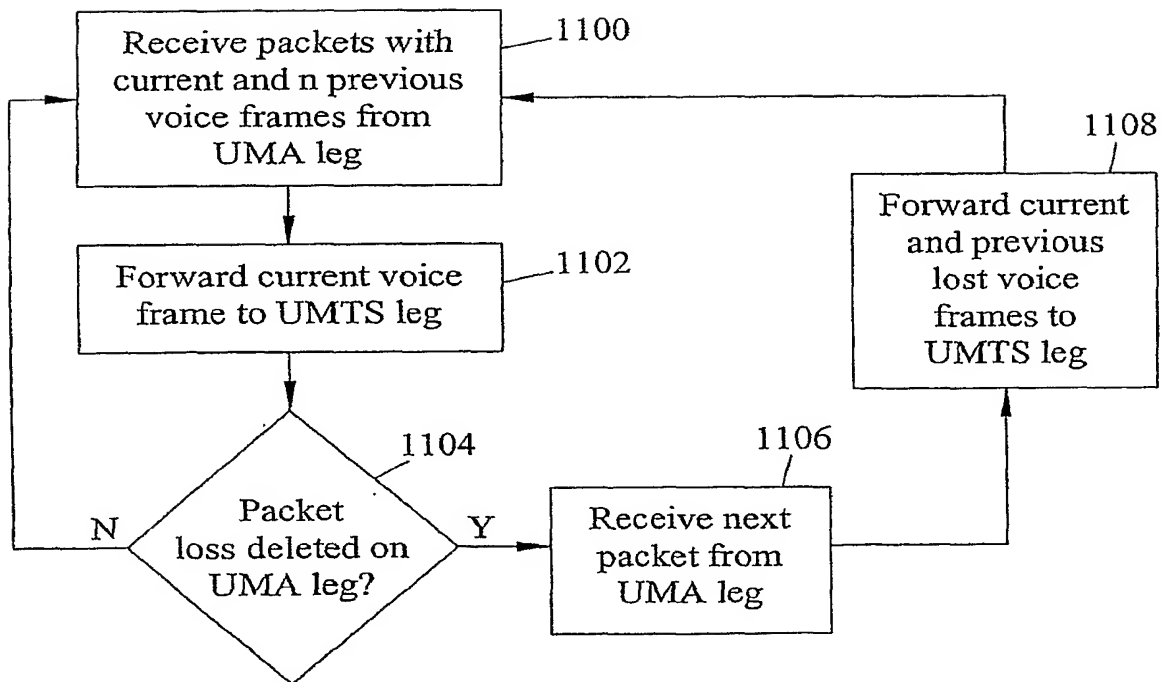


FIG. 11

12/13

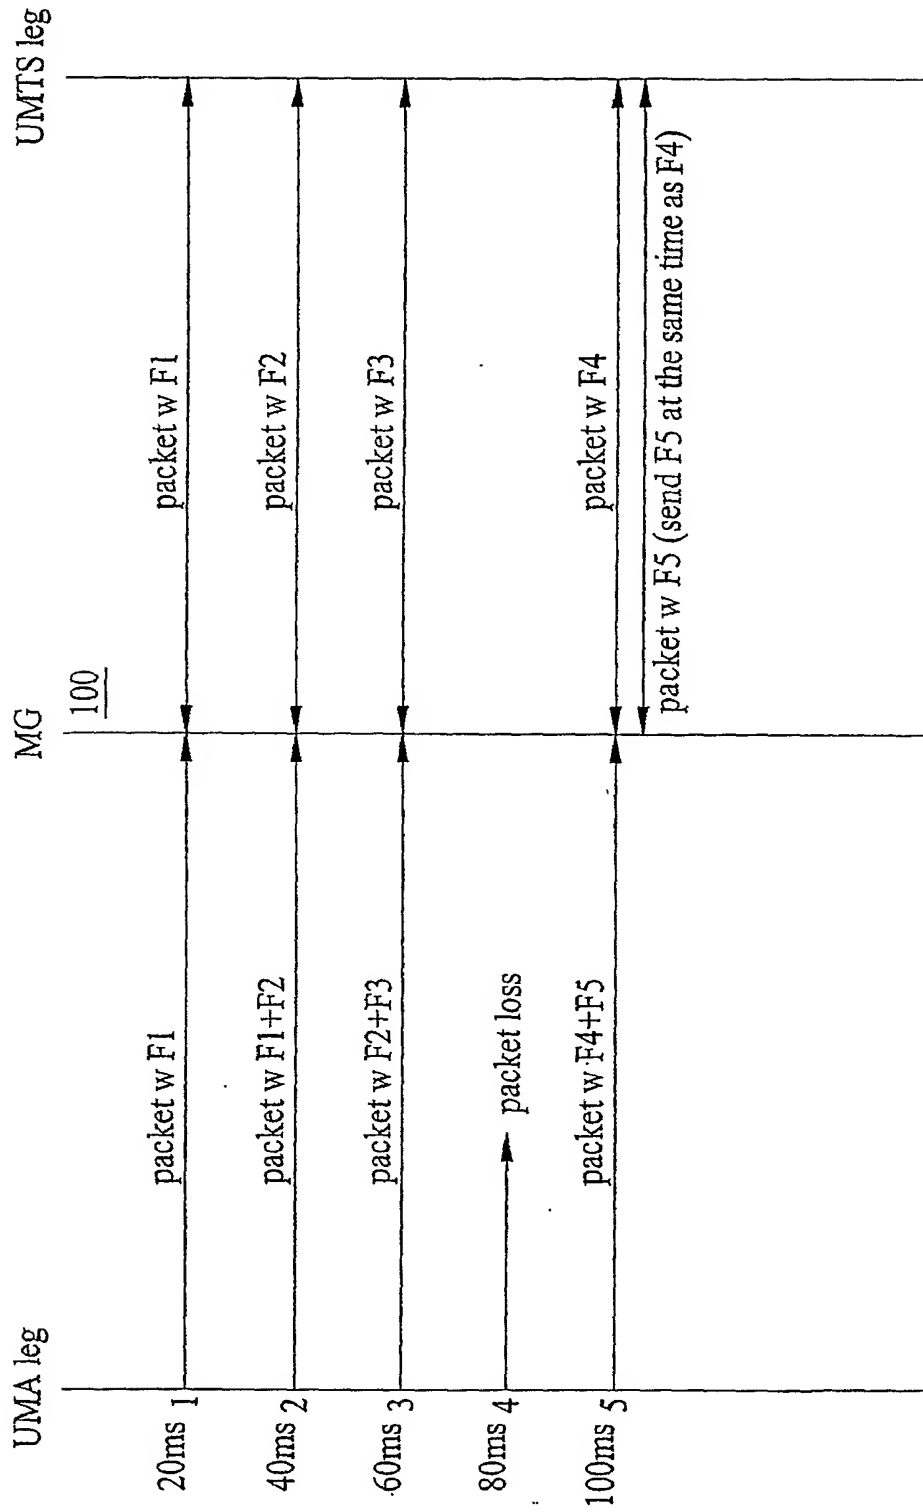


FIG. 12

13/13

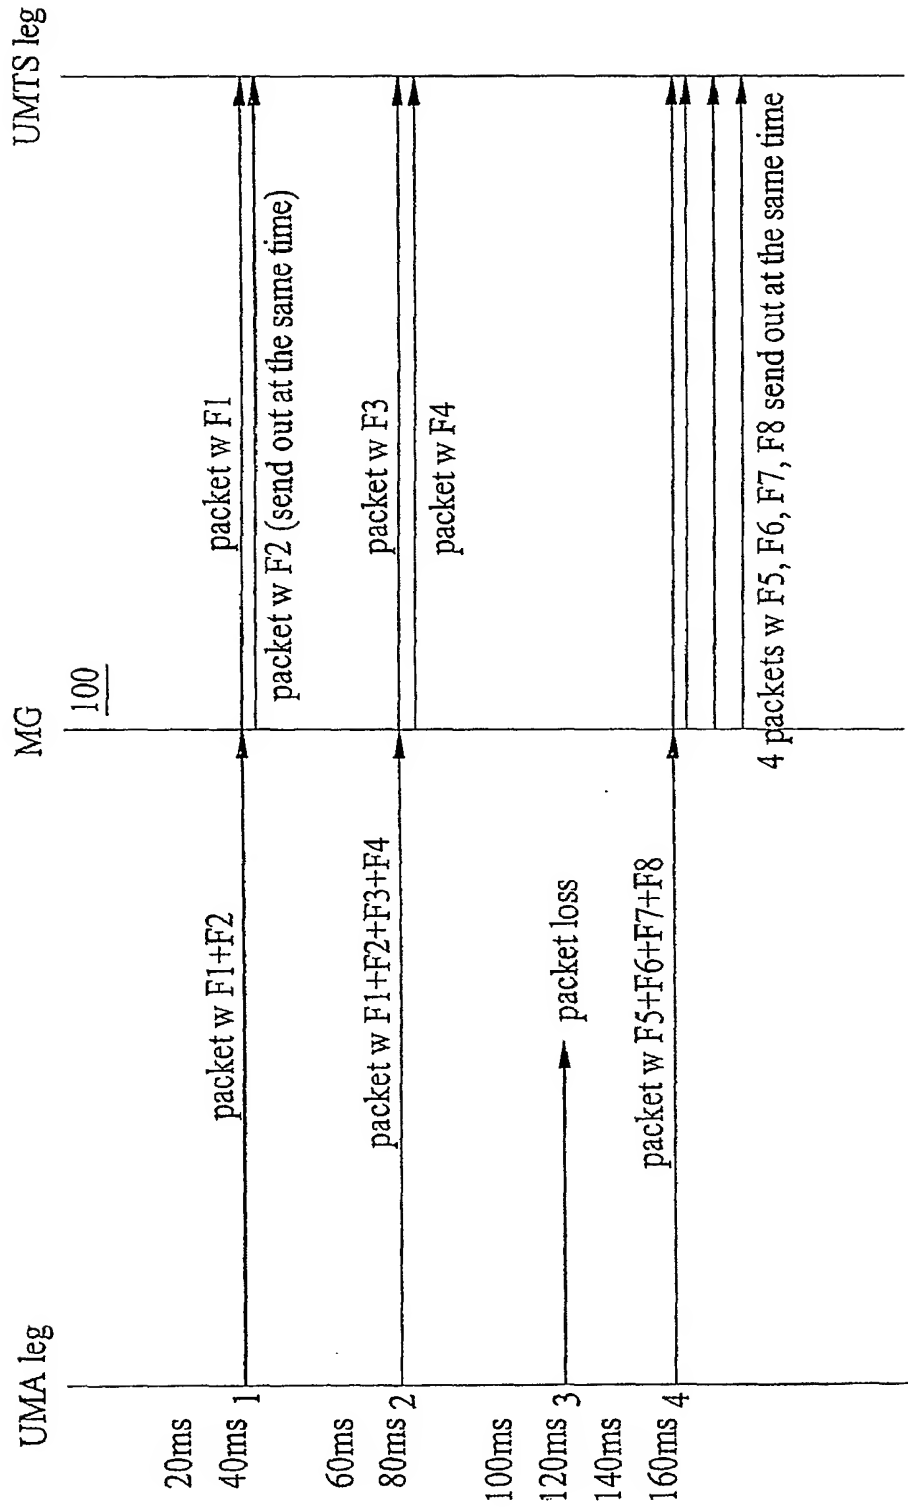


FIG. 13